

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
28 March 2002 (28.03.2002)


PCT

(10) International Publication Number
WO 02/24019 A1

- (51) International Patent Classification⁷: **A45B 3/00**
- (21) International Application Number: **PCT/NL01/00661**
- (22) International Filing Date:
6 September 2001 (06.09.2001)
- (25) Filing Language: Dutch
- (26) Publication Language: English
- (30) Priority Data:
1016220 19 September 2000 (19.09.2000) NL
- (71) Applicant and
(72) Inventor: **JACOBS, Robertus, Andreas, Anna, Martinus** [NL/NL]; Van Starckenborghstraat 56, NL-9721 EE Groningen (NL).
- (74) Agent: **DOKTER, Hendrik, Daniël**; Octrooibureau Dokter, P.O. Box 657, NL-7300 AR Apeldoorn (NL).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: PARASOL WITH HEATING DEVICE

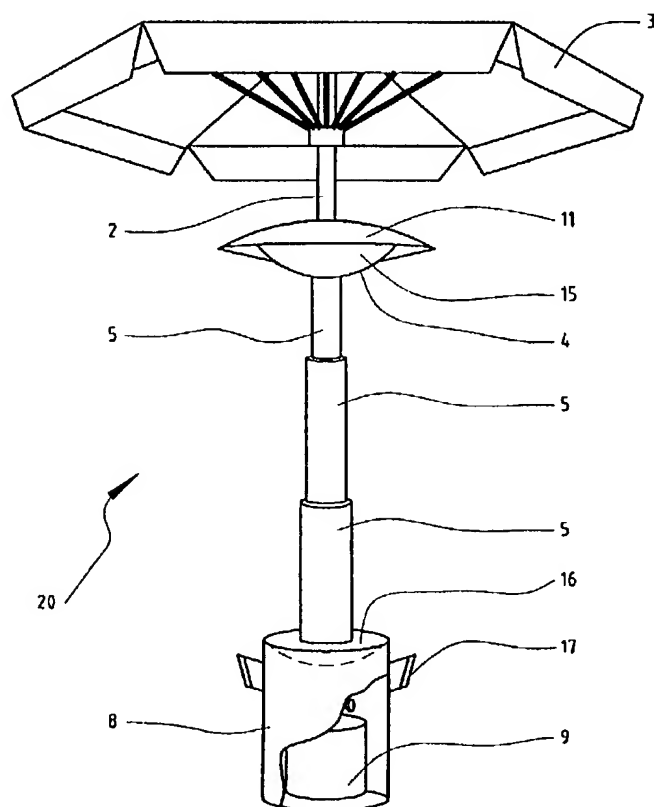

(57) Abstract: Parasol (10) comprising a column (2) which is provided with a base (8) and has attached thereto a collapsible canopy (3), provided with a heating device (4) mounted on the column (2), wherein the heating device (4) is displaceable along the column (2) between a lowest position in state of rest, wherein the canopy (3) is collapsed, and a highest position in operating state, wherein the canopy (3) is opened out.

WO 02/24019 A1



Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

PARASOL WITH HEATING DEVICE

The invention relates to a parasol comprising a column which is provided with a base and has attached thereto a collapsible canopy, provided with a heating device mounted on the column.

5 Known from the American patent specification no. 5964233 is a patio umbrella with a column fixed in a dining table, provided with a radiant heater for patio heating fixed in the column. The radiant heater in the known patio parasol is provided with a chimney on its
10 upper side which extends through an opening in the top of the canopy. The canopy is stiffened by ribs which are pivotally attached to a hood over the heater.

It is a drawback of the known patio parasol that it is necessary to discharge hot air from beneath the
15 canopy via said opening, so that the canopy does not connect to the wall of the chimney. As a result the known patio parasol offers inadequate protection against rain falling between the canopy and the chimney wall.

Another drawback is that in collapsed state the
20 canopy falls around the column with heater, wherein the chimney and the hood of the heater protrude freely and are exposed to weather and wind, which is of course detrimental to the lifespan of the heater.

An inherent drawback of the known patio parasol is
25 formed by the high purchase price, since the canopy is not of the usual types which are commercially available but must be specially constructed for application in combination with a radiant heater.

It is an object of the invention to provide a patio
30 parasol which is provided with a heating device, which parasol also offers adequate protection against rain, and the heating device of which does not necessarily remain exposed to the environment when not in use.

It is a further object to provide a patio parasol
35 with heating device, the canopy of which is of a usual

commercially available type, and which can also be manufactured at relatively low cost.

These objects are achieved, and other advantages gained, with a parasol of the type stated in the
5 preamble, wherein according to the invention the heating device is displaceable along the column between a lowest position in state of rest, wherein the canopy is collapsed, and a highest position in operating state, wherein the canopy is opened out.

10 In a simple embodiment of a parasol according to the invention the heating device is manually displaceable along the column.

The parasol is preferably provided with displacing means for displacing the heating device.

15 In one embodiment the displacing means comprise a rotatable screw spindle which extends parallel to the column and which is mounted on its underside on the column and screwed into a spindle nut rigidly coupled to the heating device.

20 In another embodiment the displacing means comprise telescopic elements extending round the column.

In a very advantageous embodiment the displacing means comprise a cable which is trained over a pulley at the top of the column and which is connected on its one
25 end to the heating device and on its other end to a winding device which is connected to the column and which can be locked for instance with a ratchet.

In an embodiment which is very easy to operate the displacing means comprise a drive motor.

30 The heating device in a parasol according to the invention is optionally an electric heating element or a gas or petrol or oil heater, and will therefore be provided with respectively a flexible electricity cable or a flexible gas or liquid conduit. In a favourable
35 embodiment of a parasol according to the invention the column is therefore provided at least partially with a

slot in longitudinal direction for receiving a flexible conduit in the column.

The invention provides particular advantage in an embodiment in which the base comprises a housing for
5 receiving the heating device in the state of rest.

If the heating device is a gas heater, the base comprises in a favourable embodiment a housing for receiving a gas tank.

A parasol according to the invention is preferably
10 provided with switching means for switching off the heating device when the parasol is collapsed, so as to prevent unsafe situations in the case of improper use.

As alternative safety measure against improper use, the parasol is provided with locking means for locking
15 the canopy in the operating state of the heating device.

The invention will now be elucidated hereinbelow on the basis of embodiments, with reference to the drawings.

In the drawings:

20 Fig. 1 shows a perspective view of a first embodiment of a parasol according to the invention,

Fig. 2 shows a perspective view of a second embodiment of a parasol according to the invention,

25 Fig. 3 shows a perspective view of a third embodiment of a parasol according to the invention,

Fig. 4 shows a schematic cross-section of a gas heater provided with a hood for a parasol according to the invention.

Corresponding components are designated in the
30 drawings with the same reference numerals.

Fig. 1 shows a parasol 10 with a canopy 3 of a usual type on a column 2 which is inserted into a base 1. In the upper part of column 2 is suspended a gas heater 4 which is slidable round column 2 and which is
35 provided with gas from a gas tank 9 from which a conduit 14 is carried along column 2 to heater 4. Heater 4 is locked with a pin 12 which protrudes through a

transverse bore 13 in column 2. Since a plurality of transverse bores 13 are arranged in column 2, the height of heater 4 is adjustable. Column 2 passes through a central opening in heater 4, wherein the cross-section
5 of this opening is larger than that of column 2, so that a substantially free space is formed between heater 4 and column 2, thus preventing column 2 from becoming overheated. Canopy 3 is manufactured from a strongly water-repellent material, for instance a 100% polyester
10 cloth, which is protected from excessively high temperatures of heater 4 by a hood 11 over heater 4.

Fig. 2 shows a parasol 20 with a column 2 which is inserted into a base which forms the housing 8 (shown cut-away) for a gas tank 9. Heater 4 is mounted on the
15 top side of a number of telescopic elements 5 which extend round column 2. In the rest state the telescopic elements 5 are telescoped, and heater 9 rests with its concave-shaped underside 15 in a corresponding convex-shaped upper part 16 of housing 8, and the gas conduit
20 (not shown) between tank 9 and heater 4, which in the operating state extends through hollow column 2, is accommodated wholly in housing 8. In order to enable easy displacement of parasol 20 the housing 8 is provided with handles 17.

25 Fig. 3 shows a parasol 30 with a column 2 which is inserted into a base which forms the housing 8 (shown cut-away) for a gas tank 9. Heater 4 is displaceable along column 2 by means of a cable (not shown) which is trained over a pulley (not shown) at the top of column 2
30 and which is connected at its one end to heater 4 and at its other end to a hand winch 6 with ratchet connected to column 2. A longitudinal slot 7 in column 2 enables the gas conduit to be carried between heater 4 and gas tank 9 through the interior of the column at any height
35 of heater 4, wherein housing 8 provides sufficient space to accommodate the gas conduit in the state of rest, wherein heater 4 rests with its convex-shaped underside

15 in the correspondingly formed concave-shaped upper part 16 of housing 8. To allow easy displacement of parasol 30 the housing 8 is provided with wheels 18.

Fig. 4 shows a part of a column 2 to which
5 respectively a gas heater 4 and a heater hood 11 are mounted using slippers 19. Gas heater 4 takes the form of a flat cylinder with upper surface 21, a lower surface 22 provided with a gas connection 25 and a perforated outer cylinder casing 23, around which a web
10 24 of a nickel alloy is wrapped by way of glow body. In order to place heater 4 round the column an opening is formed in the centre, this opening being bounded by an inner cylinder casing 26 which extends above and below heater 4 and which has a diameter which is greater than
15 that of column 2 and is provided above and below heater 4 with a reflecting surface on its outside to prevent overheating of the column by the heater. Above heater 4 a hood 11 is fixed on column 2, likewise with slippers 19 on an inner cylinder casing 27 which extends above
20 and below hood 11 and which has a diameter which is greater than that of column 2 and is provided with a reflecting surface above and below hood 11 on its outside, wherein cylinder casing 27 is bounded on the side directed toward heater 4 by a non-convex, in this
25 case flat central surface 29 and a convex peripheral paraboloid 31. The flat surface 29 protects the parasol (not shown) above hood 11 and particularly the column 2 against overheating, the paraboloid 31 reflects the infrared radiation emitted by the glow covering 24 of
30 gas heater 4 in downward direction in an annular beam, the width of which is determined by the distance between heater 4 and hood 11 and by the height of both relative to the base of the column. Hood 11 further comprises an insulating layer 28, for instance of rockwool, which is
35 enclosed between the lower surface 29, 31 and an upper surface 32.

CLAIMS

1. Parasol (10, 20, 30) comprising a column (2) which is provided with a base (1, 8) and has attached thereto a collapsible canopy (3), provided with a heating device (4) mounted on the column (2),
5 characterized in that the heating device (4) is displaceable along the column (2) between a lowest position in state of rest, wherein the canopy (3) is collapsed, and a highest position in operating state, wherein the canopy (3) is opened out.
- 10 2. Parasol (10, 20, 30) as claimed in claim 1, characterized in that it is provided with displacing means (5, 6) for displacing the heating device (4).
3. Parasol as claimed in claim 2, characterized in that the displacing means comprise a rotatable screw
15 spindle which extends parallel to the column and which is mounted on its underside on the column and screwed into a spindle nut rigidly coupled to the heating device.
4. Parasol (20) as claimed in claim 2,
20 characterized in that the displacing means comprise telescopic elements (5) extending round the column (2).
5. Parasol (30) as claimed in claim 2, characterized in that the displacing means comprise a cable which is trained over a pulley at the top of the
25 column (2) and which is connected on its one end to the heating device (4) and on its other end to a winding device (6) connected to the column (2).
6. Parasol as claimed in any of the claims 3-5, characterized in that the displacing means comprise a
30 drive motor.
7. Parasol (30) as claimed in any of the foregoing claims, characterized in that the column (2) is provided at least partially with a slot (7) in longitudinal direction for receiving a flexible conduit in the column

(2).

8. Parasol (20, 30) as claimed in any of the foregoing claims, characterized in that the base comprises a housing (8) for receiving the heating device (4) in the state of rest.

9. Parasol (10, 20, 30) as claimed in any of the foregoing claims, characterized in that the heating device is a gas heater (4).

10. Parasol (10, 20, 30) as claimed in claim 9, characterized in that the gas heater (4) comprises a central opening for receiving the column (2), wherein the cross-section of the opening is larger than that of the column (2) so as to form a substantially free space between the gas heater (4) and the column (2).

11. Parasol (20, 30) as claimed in either of the claims 9-10, characterized in that the base comprises a housing (8) for receiving a gas tank (9).

12. Parasol as claimed in any of the claims 1-11, characterized in that it is provided with a reflector (11) between the canopy (3) and the heating device (4).

13. Parasol as claimed in claim 12, characterized in that the reflector (11) is provided with a central opening for receiving the column (2), which opening is bounded on the side directed toward the heating device (4) by a non-convex central surface (29) and a convex peripheral paraboloid (31).

14. Parasol as claimed in any of the claims 1-11, characterized in that it is provided with switching means for switching off the heating device when the parasol is collapsed.

15. Parasol as claimed in any of the claims 1-11, characterized in that it is provided with locking means for locking the canopy in the operating state of the heating device.

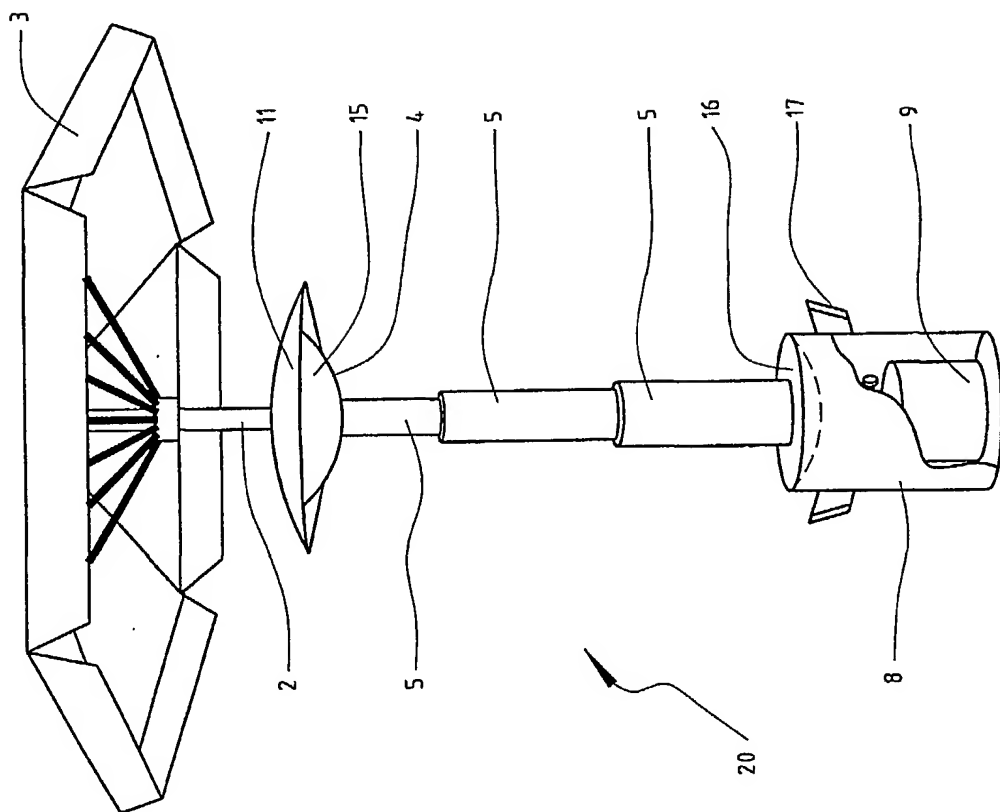


Fig. 2

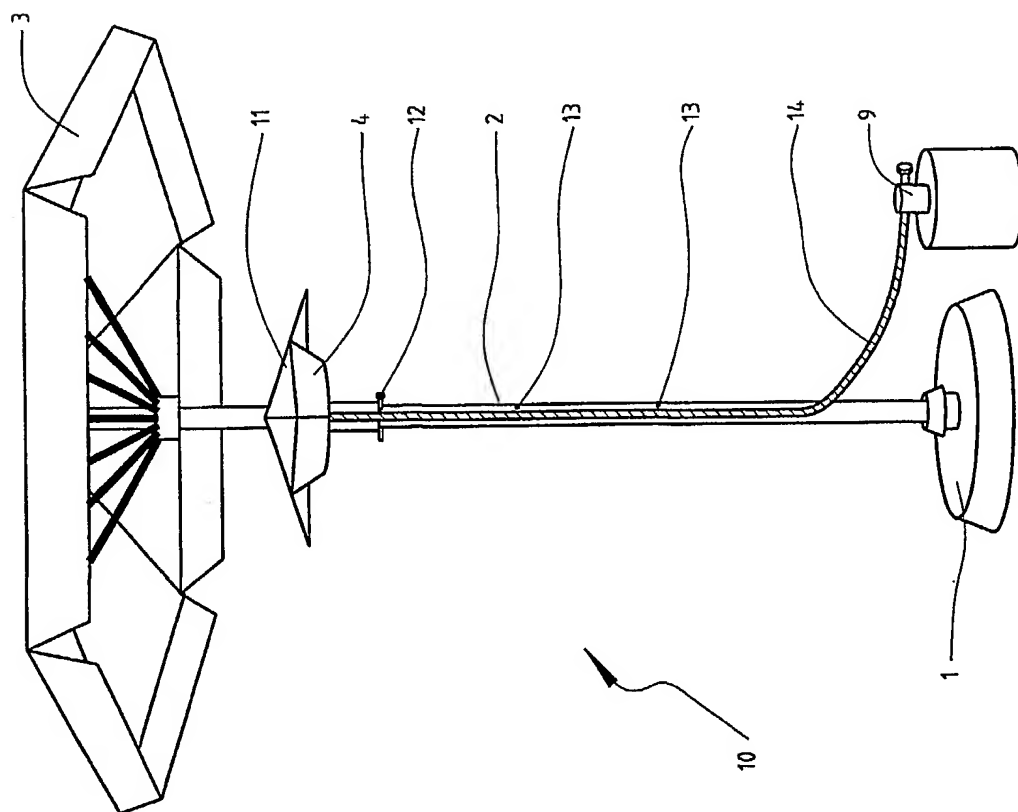


Fig. 1

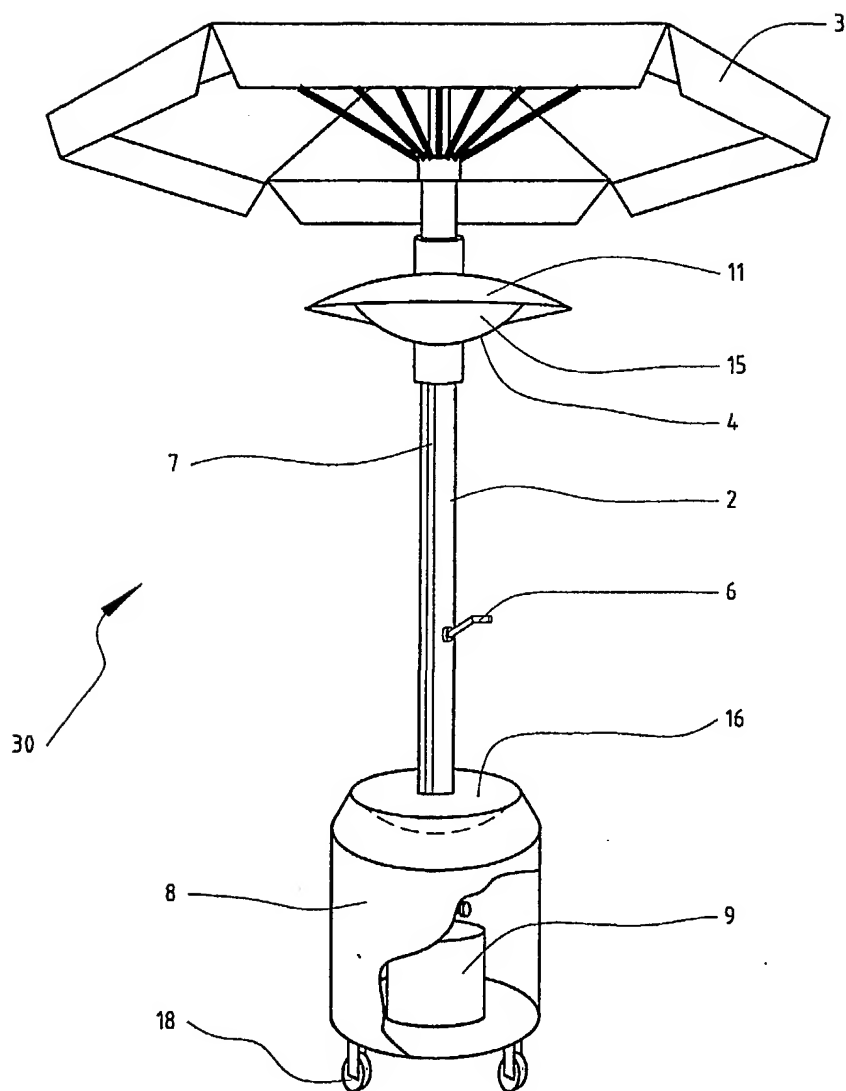


Fig. 3

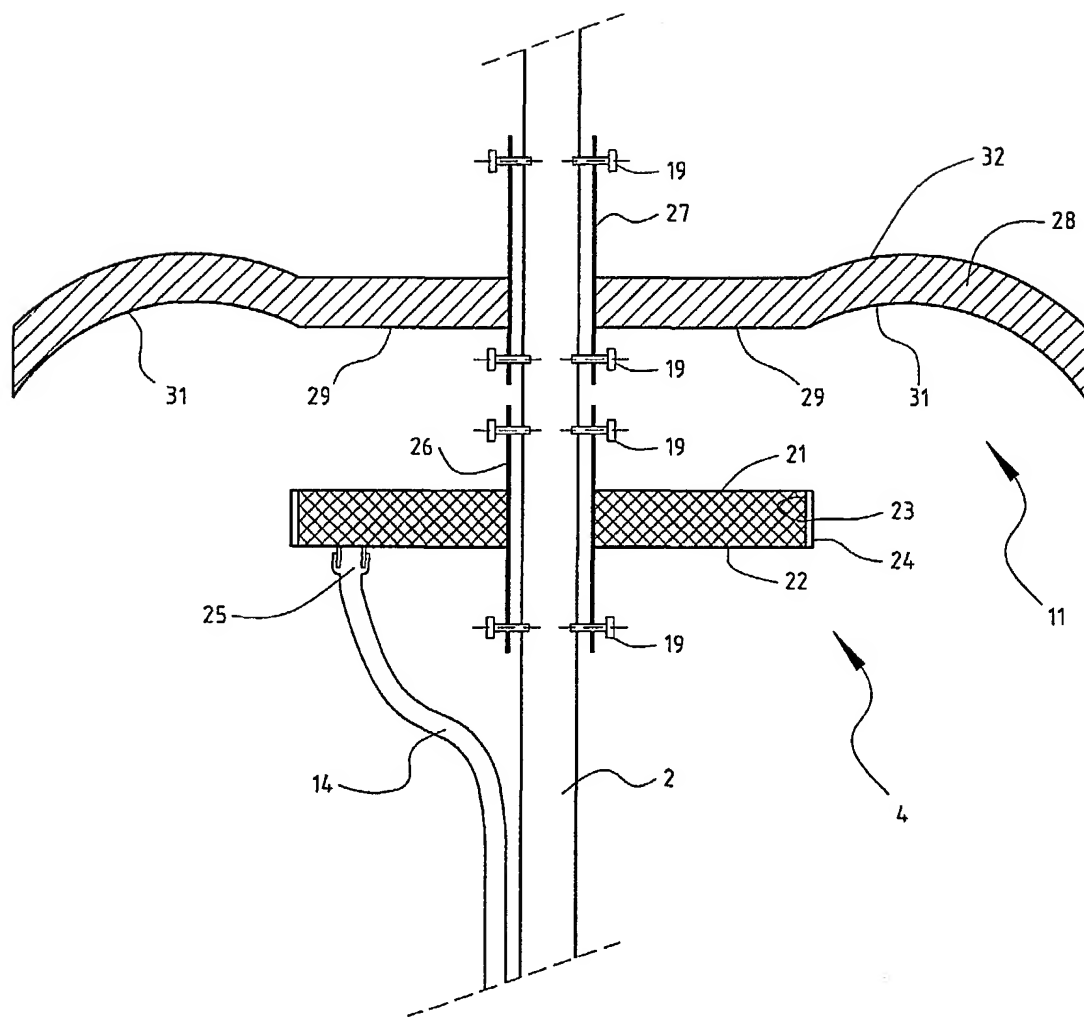


Fig. 4

INTERNATIONAL SEARCH REPORT

International Application No

PCT/NL 01/00661

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 A45B3/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 A45B F24C F24F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 964 233 A (CLARK WALTER B ET AL) 12 October 1999 (1999-10-12) cited in the application the whole document	1
A	DE 195 35 022 A (TERZER KLAUS DIETER) 27 March 1997 (1997-03-27) claim 1; figures 1-4	1
A	EP 0 851 178 A (B I S R L) 1 July 1998 (1998-07-01)	
A	EP 0 887 597 A (B I S R L) 30 December 1998 (1998-12-30)	
A	EP 0 976 979 A (TIDEY ALISTAIR ;CONNELL JOSEPH O (IE)) 2 February 2000 (2000-02-02)	

☐ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *Z* document member of the same patent family

Date of the actual completion of the international search

4 January 2002

Date of mailing of the international search report

11/01/2002

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax (+31-70) 340-3016

Authorized officer

Sigwalt, C

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/NL 01/00661

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5964233	A	12-10-1999	EP 1105014 A1 WO 0008965 A1	13-06-2001 24-02-2000
DE 19535022	A	27-03-1997	DE 19535022 A1	27-03-1997
EP 0851178	A	01-07-1998	IT MI962733 A1 IT MI962734 A1 CA 2226018 A1 EP 0851178 A1	23-06-1998 23-06-1998 23-06-1998 01-07-1998
EP 0887597	A	30-12-1998	IT MI971502 A1 CA 2241562 A1 EP 0887597 A2	28-12-1998 25-12-1998 30-12-1998
EP 0976979	A	02-02-2000	IE 980646 A2 EP 0976979 A1	10-03-1999 02-02-2000